

C65 Microturbine

High-pressure Natural Gas, ICHP – CARB Certified

CARB certified to achieve ultra-low emissions and reliable electrical/thermal generation from natural gas.



C65 ICHP Microturbine

Electrical Performance⁽¹⁾

Electrical Power Output	65kW
Voltage	400/480 VAC
Electrical Service	3-Phase, 4 Wire Wye
Frequency	50/60 Hz
Electrical Efficiency LHV	28%

Fuel/Engine Characteristics⁽¹⁾

Natural Gas HHV	35.4–42.8 MJ/m ³ (950–1,150 BTU/scf)
Inlet Pressure	517–551 kPa gauge (75–80 psig)
Fuel Flow HHV	919 MJ/hr (871,000 BTU/hr)
Net Heat Rate LHV	12.9 MJ/kWh (12,200 BTU/kWh)

Exhaust Characteristics⁽¹⁾

Exhaust Mass Flow	0.51 kg/s (1.13 lbm/s)
Exhaust Gas Temperature	311°C (592°F) (Heat Recovery Bypassed)

Benefits

- Ultra-low emissions
- One moving part – minimal maintenance and downtime
- Patented air bearings – no lubricating oil or coolant
- Integrated utility synchronization – no external switchgear
- Compact modular design allows for easy, low-cost installation
- Multiple units easily combined – act as single generating source
- Remote monitoring and diagnostic capabilities
- Proven technology with tens of millions of operating hours
- Various Factory Protection Plans available

**Smarter Energy
for a Cleaner Future**

Dimensions & Weight⁽²⁾

Width x Depth x Height	0.76 x 2.20 x 2.79 m (30 x 87 x 110 in)
Weight - Grid Connect Model, dry	1,089 kg (2,400 lb)
Weight - Dual Mode Model, dry	1,451 kg (3,200 lb)

Minimum Clearance Requirements⁽³⁾

Horizontal Clearance	
Left & Right	0.76 m (30 in)
Front - Grid Connect Model	0.76 m (30 in)
Front - Dual Mode Model	1.65 m (65 in)
Rear	0.76 m (30 in)


ICHP Heat Recovery⁽⁴⁾

Integrated Heat Recovery Module Type	Copper Core
Hot Water Heat Recovery	123kW (0.42 MMBTU/hr)

Acoustic Emissions

Nominal at Full Power at 10 m (33 ft) | 65 dBA

C65 Engine Components

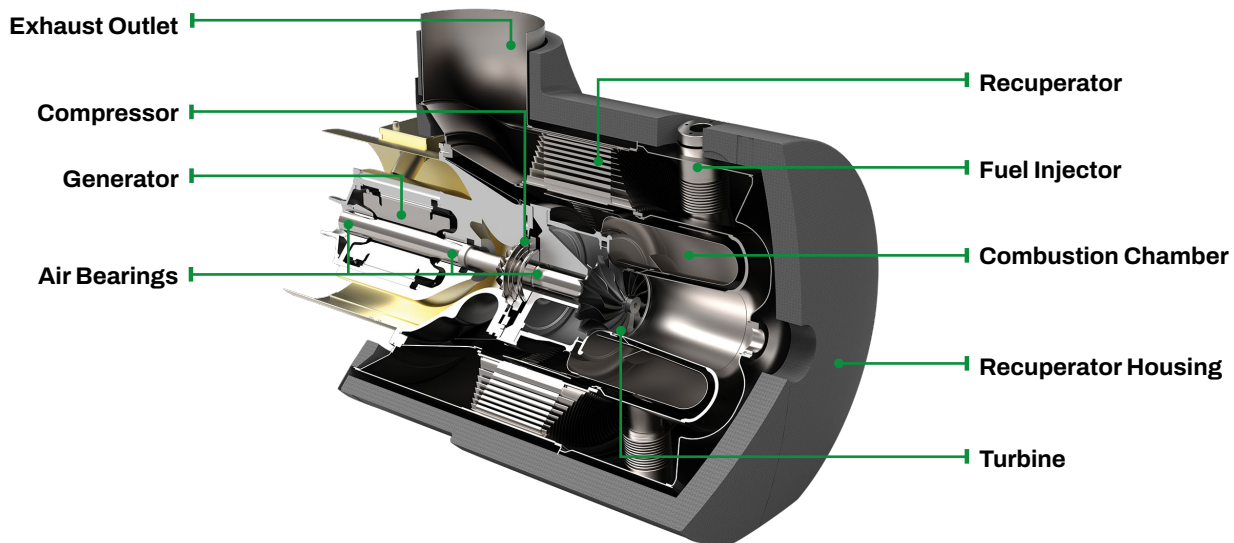

(1) Nominal full power performance at ISO conditions: 15°C (59°F), 14.696 psia, 60% RH

(2) Approximate dimensions and weights

(3) Clearance requirements may increase due to local code considerations

(4) Nominal heat recovery for water inlet temperature of 60°C (140°F) and flow rate of 2.5 l/s (40 GPM)

Specifications are not warranted and are subject to change without notice.

Certifications

- UL 1741-SA and UL 2200 Listed
- Compliant to California Rule 21
- Certified to California Air Resources Board (CARB) 2007 for operation on Natural Gas