

4G IPT

Fourth Generation of the 3D Integrated Pan & Tilt Unit

Accurate Orientation and Position Control

The 4G Integrated Pan and Tilt (IPT) is a high-performance unit designed to meet the demanding requirements of providing precise, stable and responsive control over an Echoscope® sonar's orientation in dynamic marine environments. The IPT integrates seamlessly with all of Coda Octopus's sonar acquisition software applications, allowing for simultaneous control over the sonar and the rotator from a single user interface. All angular and positional offsets are dynamically calculated within the software, ensuring accurate, efficient and user-friendly operation, and eliminating the need for multiple patch testing during mapping and inspection tasks when the sonar's orientation is changed. Incorporating high-torque motors, low-backlash gearboxes, and high precision encoders as standard, the IPT units are capable of station holding real-time 3D sonars in hydrodynamic environments, delivering a maximum torque of 94 Nm to move payloads up to 50kg (110 lbs). Enclosed in rugged stainless steel housings, the units are designed for operation at depths of either 30m, 500m, or 3000m. Units are also supplied with either a SubConn® Connector, or Teledyne Connector, at the customer's preference.

When utilizing 4G USE®, Operators can make use of Automatic Rotator Tracking, this function allows users to track an object in the scene, and the rotator will attempt to keep the object in view by automatically panning and tilting as appropriate. This could be a model at a known fixed location, or a model that has motion applied from another source, such as a crane or a ROV transponder beacon.



Some of the innovative 4G IPT features available are:



±90° Tilt and ±180° Pan Motion

Includes rugged interface plate to simplify mounting on pole or ROV



Orientation Options

Deploy the sonar in portrait or landscape mode



Automatic Rotator Tracking

Using sonar data, the Rotator will track and keep the object in view automatically



Time-Synchronized Output

The Rotator will maintain time synchronisation with the sonar, ensuring that angular offsets are applied and corrected precisely



Hard Stop Index


Simplifying the configuration of angular range of movement

Depth Rating	IPT-30 30m	IPT-500 500m	IPT-3000 3000m
Peak Torque	94 Nm		
Operational Torque	61 Nm		
Resolution (Absolute Encoder)	+/-0.025°		
Harmonic Gear Backlash	0.5° Standard Accuracy Gearbox*		
Speed Typical	10° per second		
Angular Range (Pan)	7-355°		
Angular Range (Tilt)	4-177°		
Control Interface	RS-232 (Ethernet per request)	RS-232 (Ethernet per request)	RS-232
Time Synchronization	Via 3D Connect 5G, 3D PSU 5G		
Supply Voltage	24 - 30V DC		
Power Consumption (Dynamic)	Up to 2.0A at 24V DC		
Power Consumption (Static)	200 mA (at brakehold position) at 24V DC		

IPT-30 & IPT-50
w - 310mm (12.2")
h - 335mm (13.2")
d - 112mm (4.4")
g - 9mm (0.35")

IPT-3000
w - 340 mm
(All other Dimensions same)

Pan Plate -
d2 - 222mm (8.75")
d3 - 180mm (7.08")
16mm x 18mm holes

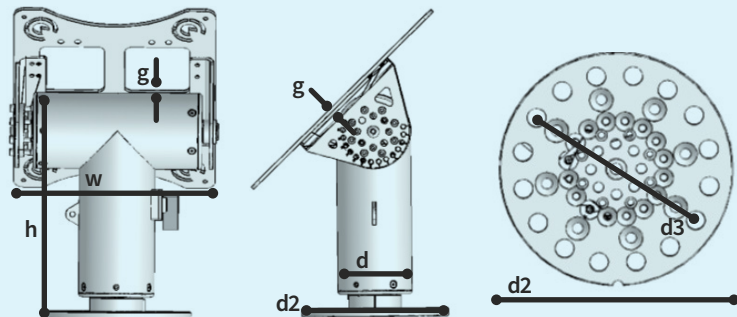

Weight in Air
24.8 kg
(54.7 lbs)

Connector
Subconn MCBHRA8M (RS-232 serial only).

Construction
Welded 'T', 316/A4 marine grade stainless steel (Aluminium and Titanium available on request)

Output Shaft
35mm diameter, Nitronic 60 steel, splined interface with pre-installed interface plate

Echoscope®, Echoscope4G®, Echoscope PIPE®, Echoscope® Ping Pong, Echoscope® 5D, Echoscope® 6D, Ping-Pong Sonar®, Ping-Pong Echoscope®, Echoscope PIPE Nano Gen Series®, 4G USE®, CodaOctopus®, F180 Series®, F280 Series® (Reg, Us Pat & TM off) are trademarks of Coda Octopus. The information in this publication was correct when it was published but specifications may change without notice. Photos are included for illustrative purposes only and actual items may differ in appearance. Coda Octopus does not assume responsibility for typographical or photographic errors.

Sales Worldwide: +44 131 553 1380 Sales Americas: +1 407 735 2400
More Information: sales@codaoctopus.com salesamericas@codaoctopus.com www.codaoctopus.com
Technical Support Worldwide: +44 131 553 7003 Technical Support Americas: +1 888 340 2632